


LED LIGHTING

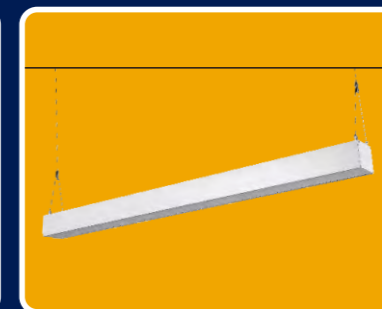

Allspark Lighting Limited

Add: Xueziwei Industrial Park, Bao'an, Shenzhen, China

Website: www.allspark-lighting.com

Email: info@allspark-lighting.com



About us

Allspark Lighting Co., Ltd. is a professional company engaged in the design, manufacturing, and sales of lighting products. Founded in 2017, our headquarters is located in Shenzheng city. We are dedicated to providing customers with high-quality, innovative, and eco-friendly lighting solutions.

As a leading lighting supplier, we have a research and development team with 10 years of experience in lighting fixtures and technical engineers who are committed to designing lighting products that meet market demands and trends. Our product line includes indoor lighting, commercial lighting, and custom lighting solutions. In addition to standard products, we also provide OEM and ODM services to meet individual requirements.

We prioritize quality management and adhere to strict quality control and testing processes to ensure that each product meets international standards and customer requirements. Allspark products have obtained cULus, cETLus, DLC, CE, RoHS certificates. We also focus on environmental protection and sustainable development, striving to promote energy-efficient lighting and the use of eco-friendly materials to minimize our impact on the environment.

Our customers are located worldwide and include residential developers, commercial institutions, hotels, retailers, and individual consumers. Through close collaboration with our customers, we strive to provide customized lighting solutions that meet their needs and budgets.

Allspark upholds the principles of integrity, innovation, and service excellence, constantly striving for excellence. We will continue to focus on delivering high-quality lighting products and providing excellent after-sales service, sharing the development and progress of the lighting industry with our customers.

Contents

Steel Housing Surface Mounted Series	01-07
Aluminum Housing Surface Mounted Series	08-20
Wall Mounted Series(Under-cabinet, Mirror light, Over bed light)	21-28
Suspended Mounted Series	29-48
Recessed Mounted Series	49
Waterproof Light Series	50-59
Industrial High Bay Series	60-63




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SS	10W	605x71x58	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED20-SS-2	20W	605x71x58						
AP-LED20-SS	20W	1222x71x58	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED30-SS	30W	1222x71x58						
AP-LED40-SS	40W	1222x71x58	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED50-SS	50W	1501x71x58						
AP-LED60-SS	60W	1501x71x58						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

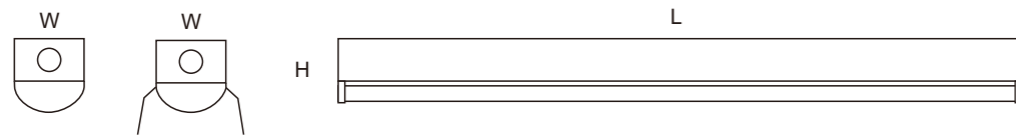

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HYPC	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-HYPC	40W	1187x71x83 / 1187x128x112	120-347V	4000K				
AP-LED230-HYPC	60W	1501x71x83 / 1501x128x112	220-240V	5000K				
				6500K	CRI>90	140Lm/W		




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

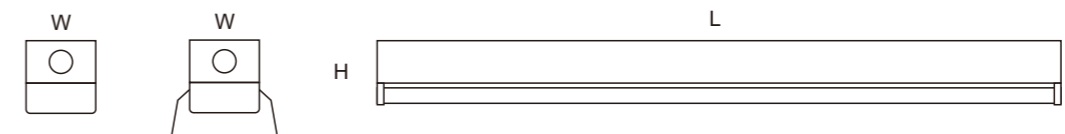

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HFPC	20W	605x71x92 / 605x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-HFPC	40W	1215x71x92 / 1215x128x112	120-347V	4000K				
AP-LED230-HFPC	60W	1501x71x92 / 1501x128x112	220-240V	5000K				
				6500K	CRI>90	140Lm/W		




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate cover.
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-SPC	20W	612x111x62	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-SPC-2	40W	612x111x62		4000K				
AP-LED220-SPC	40W	1222x111x62	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED230-SPC	60W	1222x111x62	220-240V	6500K				
AP-LED230-SPC-5	60W	1508x111x62						
AP-LED240-SPC	80W	1508x111x62						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover.
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-NWPC	20W	612x111x78	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-NWPC-2	40W	612x111x78		4000K				
AP-LED220-NWPC	40W	1222x111x78	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED320-NWPC	60W	1222x111x78	220-240V	6500K				
AP-LED240-NWPC	80W	1222x111x78						
AP-LED330-NWPC	90W	1222x111x78						
AP-LED225-NWPC	50W	1508x111x78						
AP-LED230-NWPC	60W	1508x111x78						
AP-LED250-NWPC	100W	1508x111x78						
AP-LED260-NWPC	120W	1508x111x78						




FEATURES:

- Aluminum Body,
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-NBPC(2)	20W	580x133x60	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-NBPC-2(2)	40W	580x133x60						
AP-LED220-NBPC(2)	40W	1190x133x60						
AP-LED230-NBPC-4(2)	60W	1190x133x60						
AP-LED225-NBPC(2)	50W	1470x133x60						
AP-LED230-NBPC(2)	60W	1470x133x60						
AP-LED245-NBPC(2)	90W	1470x133x60						
AP-LED250-NBPC(2)	100W	1470x133x60						
AP-LED240-NBPC(2)	80W	2370x133x60						
AP-LED260-NBPC(2)	120W	2370x133x60						




FEATURES:

- Cold rolled steel housing
- Aluminum heatsink
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED220-WB	40W	1225x175x73	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED320-WB	60W	1225x175x73						
AP-LED240-WB	80W	1225x175x73						
AP-LED330-WB	90W	1225x175x73						
AP-LED340-WB	120W	1225x175x73						
AP-LED225-WB	50W	1511x175x73						
AP-LED230-WB	60W	1511x175x73						
AP-LED250-WB	100W	1511x175x73						
AP-LED260-WB	120W	1511x175x73						
AP-LED330-WB-5	90W	1511x175x73						
AP-LED350-WB	150W	1511x175x73						
AP-LED360-WB	180W	1511x175x73						




FEATURES:

- Aluminum Body, Polycarbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-JL	10W	584x32x40	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED15-JL	15W	584x32x40		4000K				
AP-LED20-JL	20W	1194x32x40	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED30-JL	30W	1194x32x40		6500K				
AP-LED25-JL	25W	1480x32x40	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED30-JL	30W	1480x32x40						
AP-LED40-JL	40W	2370x32x40						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-JLZ	10W	584x81x43	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED15-JLZ	15W	584x81x43						
AP-LED20-JLZ	20W	1194x81x43	120-347V	4000K	CRI>83	115Lm/W	120°	5 years
AP-LED30-JLZ	30W	1194x81x43						
AP-LED25-JLZ	25W	1480x81x43	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED30-JLZ	30W	1480x81x43						
AP-LED40-JLZ	40W	2370x81x43		6500K				




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-JLPC	20W	594x86x65	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-JLPC	40W	1204x86x65						
AP-LED320-JLPC	60W	1204x86x65	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED224-JLPC	50W	1490x86x65						
AP-LED230-JLPC	60W	1490x86x65	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED240-JLPC	80W	2374x86x65						
AP-LED245-JLPC	90W	1490x86x65		6500K				
AP-LED250-JLPC	100W	1490x86x65						
AP-LED260-JLPC	120W	2374x86x65						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-JLPC(2)	20W	574x66x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-JLPC(2)	40W	1184x66x75						
AP-LED320-JLPC(2)	60W	1184x66x75						
AP-LED224-JLPC(2)	50W	1470x66x75						
AP-LED230-JLPC(2)	60W	1470x66x75						
AP-LED240-JLPC(2)	80W	2364x66x75						
AP-LED245-JLPC(2)	90W	1470x66x75						
AP-LED250-JLPC(2)	100W	1470x66x75						
AP-LED260-JLPC(2)	120W	2364x66x75						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-JLPC(3)	20W	578x66x83	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-JLPC(3)	40W	1188x66x83						
AP-LED320-JLPC(3)	60W	1188x66x83						
AP-LED224-JLPC(3)	50W	1474x66x83						
AP-LED230-JLPC(3)	60W	1474x66x83						
AP-LED240-JLPC(3)	80W	2369x66x83						
AP-LED245-JLPC(3)	90W	1474x66x83						
AP-LED250-JLPC(3)	100W	1474x66x83						
AP-LED260-JLPC(3)	120W	2369x66x83						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-UDPC	10W	615x99x50	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED20-UDPC	20W	1225x99x50		4000K				
AP-LED30-UDPC	30W	1225x99x50	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED25-UDPC	25W	1511x99x50		6500K				
AP-LED30-UDPC	30W	1511x99x50	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED40-UDPC	40W	2394x99x50						
AP-LED230-UDPC	60W	2394x99x50						




FEATURES:


- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-BUD	20W	610x130x59	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-BUD	40W	610x130x59						
AP-LED220-BUD	40W	1220x130x59	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED230-BUD	60W	1220x130x59						
AP-LED225-BUD	50W	1506x130x59	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED230-BUD-5	60W	1506x130x59						
AP-LED240-BUD	80W	1506x130x59						
AP-LED250-BUD	100W	1506x130x59						
AP-LED420-BUD	80W	2394x130x59						
AP-LED430-BUD	120W	2394x130x59						
AP-LED440-BUD	160W	2394x130x59						

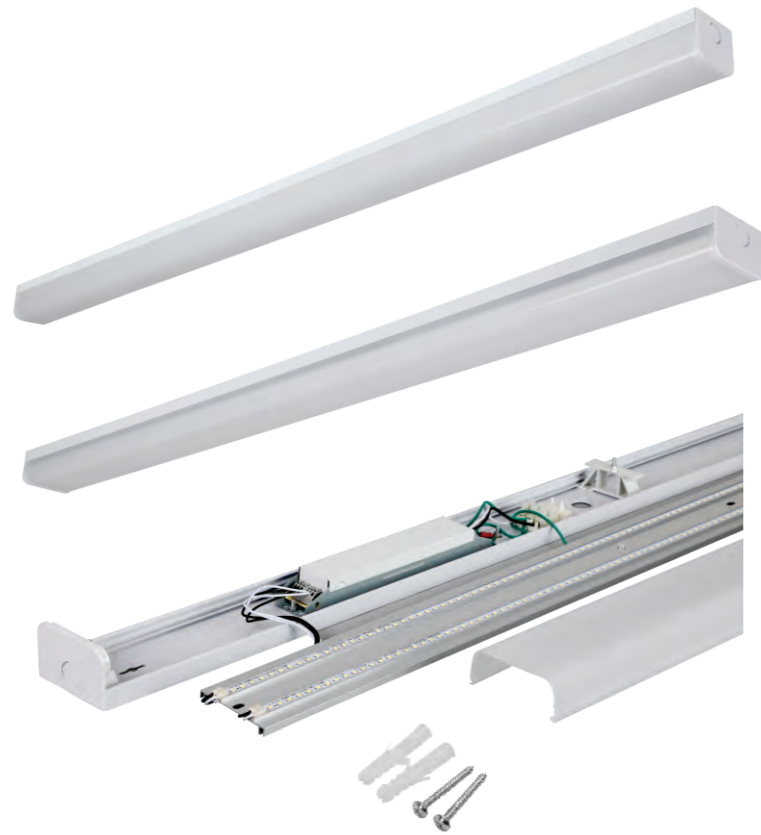


FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-FPC	20W	579x80x48	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-FPC	40W	1191x80x48		4000K				
AP-LED225-FPC	50W	1481x80x48	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED230-FPC	60W	1481x80x48	220-240V	6500K				




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-WPC	20W	626x99x75	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-WPC-2	40W	626x99x75						
AP-LED220-WPC	40W	1236x99x75	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED320-WPC	60W	1236x99x75						
AP-LED240-WPC	80W	1236x99x75	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED340-WPC	120W	1236x99x75						
AP-LED225-WPC	50W	1522x99x75	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED230-WPC	60W	1522x99x75						
AP-LED250-WPC	100W	1522x99x75	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED260-WPC	120W	1522x99x75						
AP-LED350-WPC	150W	1522x99x75	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED360-WPC	180W	1522x99x75						
AP-LED240-WPC-8	80W	2406x99x75	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED340-WPC-8	120W	2406x99x75						
AP-LED440-WPC	160W	2406x99x75	220-240V	6500K	CRI>90	140Lm/W	120°	5 years
AP-LED640-WPC	240W	2406x99x75						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SOPC(F)	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-SOPC(F)	20W	1189x51x65						
AP-LED30-SOPC(F)	30W	1189x51x65						
AP-LED40-SOPC(F)	40W	1189x51x65						
AP-LED25-SOPC(F)	25W	1475x51x65						
AP-LED30-SOPC(F)	30W	1475x51x65						
AP-LED50-SOPC(F)	50W	1475x51x65						
AP-LED60-SOPC(F)	60W	1475x51x65						
AP-LED40-SOPC(F)	40W	2369x51x65						
AP-LED80-SOPC(F)	80W	2369x51x65						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-RPC(2)	40W	1188x63x65						
AP-LED220-RPC(2)	40W	1188x63x65						
AP-LED224-RPC(2)	48W	1188x63x65						
AP-LED230-RPC(2)	60W	1474x63x65						
AP-LED230-RPC(2)	60W	1799x63x65						
AP-LED240-RPC(2)	80W	1799x63x65						
AP-LED240-RPC(2)	80W	2369x63x65						
AP-LED248-RPC(2)	96W	2369x63x65						
AP-LED260-RPC(2)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-NBPC	20W	615x120x40	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-NBPC-2	40W	615x120x40						
AP-LED220-NBPC	40W	1225x120x40						
AP-LED 230-NBPC-4	60W	1225x120x40						
AP-LED225-NBPC	50W	1511x120x40						
AP-LED230-NBPC	60W	1511x120x40						
AP-LED245-NBPC	90W	1511x120x40						
AP-LED250-NBPC	100W	1511x120x40						
AP-LED 240-NBPC	80W	2394x120x40						
AP-LED260-NBPC	120W	2394x120x40						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-YPC	20W	697x125x40	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-YPC-2	40W	697x125x40						
AP-LED220-YPC	40W	1307x125x40						
AP-LED230-YPC-4	60W	1307x125x40						
AP-LED224-YPC	50W	1593x125x40						
AP-LED230-YPC	60W	1593x125x40						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED6-BPC	6W	304x30x61	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED10-BPC	10W	569x30x61		4000K				
AP-LED15-BPC	15W	894x30x61	120-347V	5000K	CRI>90	140Lm/W		
AP-LED20-BPC	20W	1180x30x61	220-240V	6500K				
AP-LED24-BPC	25W	1466x30x61						
AP-LED30-BPC	30W	1466x30x61						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED6-BPC(2)	6W	348x69x92	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED10-BPC(2)	10W	619x69x92						
AP-LED15-BPC(2)	15W	939x69x92						
AP-LED20-BPC(2)	20W	1224x69x92						
AP-LED24-BPC(2)	25W	1510x69x92						
AP-LED30-BPC(2)	30W	1510x69x92						
AP-LED0606-BPC(2)	6W+6W	348x69x92						
AP-LED1010-BPC(2)	10W+10W	614x69x92						
AP-LED1515-BPC(2)	15W+15W	939x69x92						
AP-LED2020-BPC(2)	20W+20W	1224x69x92						
AP-LED2424-BPC(2)	25W+25W	1510x69x92						
AP-LED3030-BPC(2)	30W+30W	1510x69x92						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED6-BPC(3)	6W	349x52x89	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED10-BPC(3)	10W	608x52x89						
AP-LED15-BPC(3)	15W	940x52x89						
AP-LED20-BPC(3)	20W	1225x52x89						
AP-LED24-BPC(3)	25W	1511x52x89						
AP-LED30-BPC(3)	30W	1511x52x89						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color: White, Silver, Black

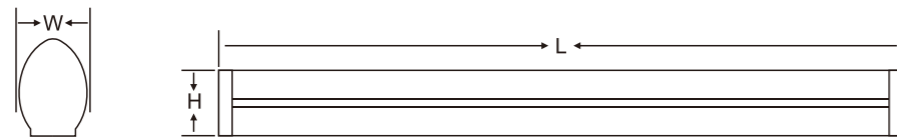

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HB	10W+10W	590x89x131	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED215-HB	15W+15W	916x89x131	120-347V	4000K				
AP-LED220-HB	20W+20W	1201x89x131	220-240V	5000K 6500K				




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color: White, Silver, Black

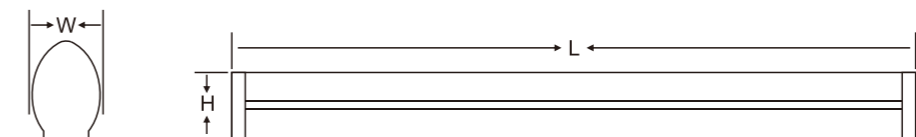

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HB(2)	10W+10W	590x89x131	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED215-HB(2)	15W+15W	916x89x131	120-347V	4000K				
AP-LED220-HB(2)	20W+20W	1201x89x131	220-240V	5000K 6500K				




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-RPC(2)	20W	1188x63x65						
AP-LED220-RPC(2)	40W	1188x63x65						
AP-LED224-RPC(2)	48W	1188x63x65						
AP-LED230-RPC(2)	60W	1474x63x65						
AP-LED230-RPC(2)	60W	1799x63x65						
AP-LED240-RPC(2)	80W	1799x63x65						
AP-LED240-RPC(2)	80W	2369x63x65						
AP-LED248-RPC(2)	96W	2369x63x65						
AP-LED260-RPC(2)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Outlet socket
- USB socket
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED20-LPC	20W	578x86x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-LPC	40W	1188x86x75						
AP-LED230-LPC	60W	1188x86x75						
AP-LED225-LPC	50W	1474x86x75						
AP-LED230-LPC	60W	1474x86x75						
AP-LED240-LPC	80W	2369x86x75						
AP-LED260-LPC	120W	2369x86x75						
AP-LED20/20-LUPC	UP:20W DOWN:20W	578x86x75						
AP-LED10/20-LUPC	UP:10W DOWN:20W	578x86x75						
AP-LED10/30-LUPC	UP:10W DOWN:30W	1188x86x75						
AP-LED20/40-LUPC	UP:20W DOWN:40W	1188x86x75						
AP-LED40/40-LUPC	UP:40W DOWN:40W	1188x86x75						
AP-LED25/50-LUPC	UP:25W DOWN:50W	1474x86x75						
AP-LED50/50-LUPC	UP:50W DOWN:50W	1474x86x75						
AP-LED40/60-LUPC	UP:40W DOWN:60W	1474x86x75						
AP-LED60/60-LUPC	UP:60W DOWN:60W	1474x86x75						
AP-LED40/80-LUPC	UP:40W DOWN:80W	2369x86x75						
AP-LED80/80-LUPC	UP:80W DOWN:80W	2369x86x75						
AP-LED60/120-LUPC	UP:60W DOWN:120W	2369x86x75						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- ON/OFF Switch
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED20/20-LUPC-2	UP:20W DOWN:20W	578x52x90	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED10/20-LUPC-2	UP:10W DOWN:20W	578x52x90						
AP-LED15/15-LUPC-2	UP:15W DOWN:15W	904x52x90	120-347V	4000K	CRI>90	140Lm/W		
AP-LED15/25-LUPC-2	UP:15W DOWN:25W	904x52x90						
AP-LED30/30-LUPC-2	UP:30W DOWN:30W	904x52x90	220-240V	6500K				
AP-LED10/30-LUPC-2	UP:10W DOWN:30W	1189x52x90						
AP-LED20/40-LUPC-2	UP:20W DOWN:40W	1189x52x90						
AP-LED40/40-LUPC-2	UP:40W DOWN:40W	1189x52x90						
AP-LED25/50-LUPC-2	UP:25W DOWN:50W	1475x52x90						
AP-LED50/50-LUPC-2	UP:50W DOWN:50W	1475x52x90						
AP-LED40/60-LUPC-2	UP:40W DOWN:60W	1475x52x90						
AP-LED60/60-LUPC-2	UP:60W DOWN:60W	1475x52x90						






FEATURES:


- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SOPC	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-SOPC	20W	1189x51x65						
AP-LED30-SOPC	30W	1189x51x65						
AP-LED40-SOPC	40W	1189x51x65						
AP-LED25-SOPC	25W	1474x51x65						
AP-LED30-SOPC	30W	1474x51x65						
AP-LED50-SOPC	50W	1474x51x65						
AP-LED60-SOPC	60W	1474x51x65						
AP-LED40-SOPC	40W	2369x51x65						
AP-LED80-SOPC	80W	2369x51x65						

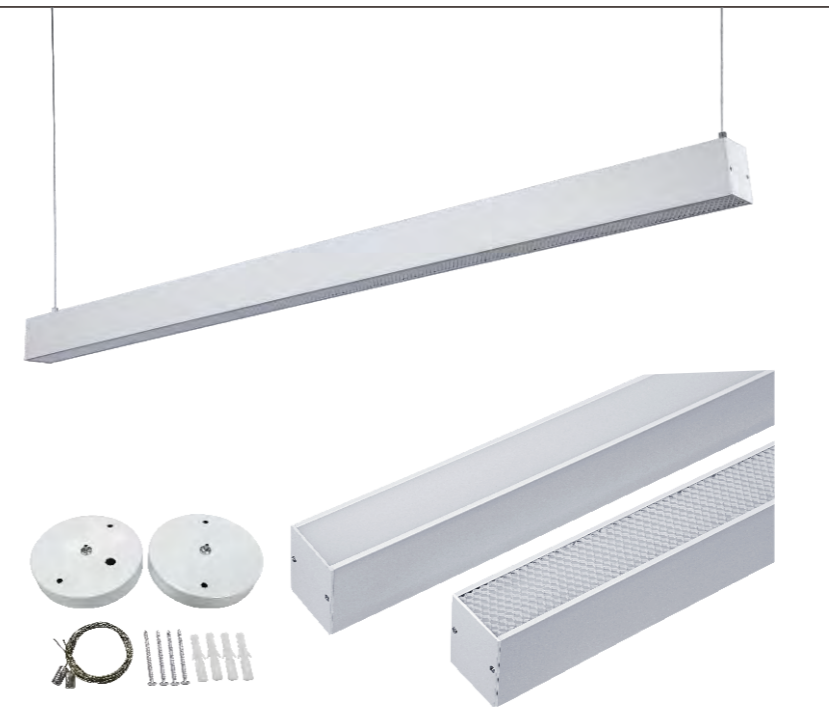


FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SOPC(F)	10W	579x51x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-SOPC(F)	20W	1189x51x65						
AP-LED30-SOPC(F)	30W	1189x51x65						
AP-LED40-SOPC(F)	40W	1189x51x65						
AP-LED25-SOPC(F)	25W	1475x51x65						
AP-LED30-SOPC(F)	30W	1475x51x65						
AP-LED50-SOPC(F)	50W	1475x51x65						
AP-LED60-SOPC(F)	60W	1475x51x65						
AP-LED40-SOPC(F)	40W	2369x51x65						
AP-LED80-SOPC(F)	80W	2369x51x65						




FEATURES:

- Aluminum Body
- Poly carbonate Cover + Plastic Louver
- Replaceable LED strips
- Built-in LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black
- 3-CCT turnable
- Wattage switchable
- Bluetooth remote control



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SOPC(G)	10W	565x49x64	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-SOPC(G)	20W	1125x49x64						
AP-LED30-SOPC(G)	30W	1125x49x64						
AP-LED40-SOPC(G)	40W	1125x49x64						
AP-LED25-SOPC(G)	25W	1405x49x64						
AP-LED30-SOPC(G)	30W	1405x49x64						
AP-LED50-SOPC(G)	50W	1405x49x64						
AP-LED60-SOPC(G)	60W	1405x49x64						
AP-LED40-SOPC(G)	40W	2245x49x64						
AP-LED80-SOPC(G)	80W	2245x49x64						




FEATURES:

- Aluminum Body
- Plastic Reflector
- Replaceable LED strips
- Built-in LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black
- Wattage switchable
- Bluetooth remote control



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SOPC(S)	10W	576x49x64	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-SOPC(S)	20W	1147x49x64						
AP-LED30-SOPC(S)	30W	1147x49x64						
AP-LED40-SOPC(S)	40W	1147x49x64						
AP-LED25-SOPC(S)	25W	1434x49x64						
AP-LED30-SOPC(S)	30W	1434x49x64						
AP-LED50-SOPC(S)	50W	1434x49x64						
AP-LED60-SOPC(S)	60W	1434x49x64						
AP-LED40-SOPC(S)	40W	2292x49x64						
AP-LED80-SOPC(S)	80W	2292x49x64						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-UDPC	20W	615x99x50	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-UDPC	20W	1225x99x50						
AP-LED220-UDPC	40W	1225x99x50						
AP-LED25-UDPC	25W	1511x99x50						
AP-LED30-UDPC	30W	1511x99x50						
AP-LED225-UDPC	50W	1511x99x50						
AP-LED230-UDPC	60W	1511x99x50						
AP-LED40-UDPC	40W	2394x99x50						
AP-LED240-UDPC	80W	2394x99x50						
AP-LED10/30-UDPC	UP:10W DOWN:30W	1225x99x50						
AP-LED10/40-UDPC	UP:10W DOWN:40W	1225x99x50						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- Linkable

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-BUD	20W	610x130x59	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-BUD	40W	610x130x59						
AP-LED10/20BUD	UP: 10W DOWN: 20W	610x130x59						
AP-LED20/40-BUD-2	UP: 20W DOWN: 40W	610x130x59						
AP-LED220-BUD	40W	1220x130x59						
AP-LED230-BUD	60W	1220x130x59						
AP-LED10/30-BUD	UP: 10W DOWN: 30W	1220x130x59						
AP-LED20/40-BUD	UP: 20W DOWN: 40W	1220x130x59						
AP-LED225-BUD	50W	1506x130x59						
AP-LED230-BUD-5	60W	1506x130x59						
AP-LED240-BUD	80W	1506x130x59						
AP-LED250-BUD	100W	1506x130x59						
AP-LED25/50-BUD	UP: 25W DOWN: 50W	1506x130x59						
AP-LED30/60-BUD	UP: 30W DOWN: 60W	1506x130x59						
AP-LED420-BUD	80W	2394x130x59						
AP-LED430-BUD	120W	2394x130x59						
AP-LED440-BUD	160W	2394x130x59						
AP-LED40/80-BUD	UP: 40W DOWN: 80W	2394x130x59						
AP-LED60/120-BUD	UP: 60W DOWN: 120W	2394x130x59						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-JLPC	20W	594x86x65	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-JLPC	40W	1204x86x65						
AP-LED230-JLPC	60W	1204x86x65						
AP-LED224-JLPC	50W	1490x86x65						
AP-LED230-JLPC	60W	1490x86x65						
AP-LED245-JLPC	90W	1490x86x65						
AP-LED250-JLPC	100W	1490x86x65						
AP-LED240-JLPC	80W	2374x86x65						
AP-LED260-JLPC	120W	2374x86x65						




FEATURES:

- Aluminum body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- 120° beam angle
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-JLPC (2)	20W	574x66x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-JLPC(2)	40W	1184x66x75						
AP-LED230-JLPC(2)	60W	1184x66x75						
AP-LED224-JLPC(2)	50W	1470x66x75						
AP-LED230-JLPC(2)	60W	1470x66x75						
AP-LED245-JLPC(2)	90W	1470x66x75						
AP-LED250-JLPC(2)	100W	1470x66x75						
AP-LED240-JLPC(2)	80W	2364x66x75						
AP-LED260-JLPC(2)	120W	2364x66x75						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-JLZ	10W	584x81x43	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED15-JLZ	15W	584x81x43						
AP-LED20-JLZ	20W	1194x81x43	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED30-JLZ	30W	1194x81x43						
AP-LED25-JLZ	25W	1480x81x43	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED30-JLZ	30W	1480x81x43						
AP-LED40-JLZ	40W	2370x81x43		6500K				




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED220-SOPC	40W	1188x83x92	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED320-SOPC	60W	1188x83x92						
AP-LED225-SOPC	50W	1474x83x92	120-347V	4000K	CRI>90	140Lm/W	120°	5 years
AP-LED230-SOPC	60W	1474x83x92						
AP-LED245-SOPC	90W	1474x83x92	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED250-SOPC	100W	1474x83x92						
AP-LED240-SOPC	80W	2372x83x92		6500K				
AP-LED260-SOPC	120W	2372x83x92						
AP-LED440-SOPC	160W	2372x83x92						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V/120-347V/220-240V 50-60Hz
- Easy maintenance
- CRI > 83, CRI > 90

OPTIONS:

- 2FT/3FT/4FT/5FT/6FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED20-LPC	20W	578x86x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-LPC	40W	1188x86x75						
AP-LED230-LPC	60W	1188x86x75						
AP-LED225-LPC	50W	1474x86x75						
AP-LED230-LPC	60W	1474x86x75						
AP-LED240-LPC	80W	2369x86x75						
AP-LED260-LPC	120W	2369x86x75						
AP-LED20/20-LUPC	UP:20W DOWN:20W	578x86x75						
AP-LED10/20-LUPC	UP:10W DOWN:20W	578x86x75						
AP-LED10/30-LUPC	UP:10W DOWN:30W	1188x86x75						
AP-LED20/40-LUPC	UP:20W DOWN:40W	1188x86x75						
AP-LED40/40-LUPC	UP:40W DOWN:40W	1188x86x75						
AP-LED25/50-LUPC	UP:25W DOWN:50W	1474x86x75						
AP-LED50/50-LUPC	UP:50W DOWN:50W	1474x86x75						
AP-LED40/60-LUPC	UP:40W DOWN:60W	1474x86x75						
AP-LED60/60-LUPC	UP:60W DOWN:60W	1474x86x75						
AP-LED40/80-LUPC	UP:40W DOWN:80W	2339x86x75						
AP-LED80/80-LUPC	UP:80W DOWN:80W	2369x86x75						
AP-LED60/120-LUPC	UP:60W DOWN:120W	2369x86x75						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Built-in LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color:White,Silver,Black
- 3-CCT turnable
- Wattage switchable
- Bluetooth remote control



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10/20-LUPC(2)	UP:10W DOWN:20W	574x50x97	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20/40-LUPC(2)	UP:20W DOWN:40W	1184x50x97						
AP-LED25/50-LUPC(2)	UP:25W DOWN:50W	1184x50x97						
AP-LED40/60-LUPC(2)	UP:40W DOWN:60W	1470x50x97						
AP-LED40/80-LUPC(2)	UP:40W DOWN:80W	2364x50x97						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- 5 years warranty
- 100-277V/120-347V/220-240V 50-60Hz
- Easy maintenance
- CRI > 83, CRI > 90

OPTIONS:

- 2FT/3FT/4FT/5FT/6FT/8FT
- CCT 3000K/4000K/5000K/6500K
- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-RPC(2)	20W	578x63x65	100-277V 120-347V 220-240V	3000K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED20-RPC(2)	20W	1188x63x65						
AP-LED220-RPC(2)	40W	1188x63x65		4000K				
AP-LED224-RPC(2)	48W	1188x63x65		5000K				
AP-LED230-RPC(2)	60W	1474x63x65		6500K				
AP-LED230-RPC(2)	60W	1799x63x65						
AP-LED240-RPC(2)	80W	1799x63x65						
AP-LED240-RPC(2)	80W	2369x63x65						
AP-LED248-RPC(2)	96W	2369x63x65						
AP-LED260-RPC(2)	120W	2369x63x65						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Emergency battery back up
- ON/OFF Switch / Pull chain switch
- Outlet socket
- USB socket
- Color: White, Silver, Black

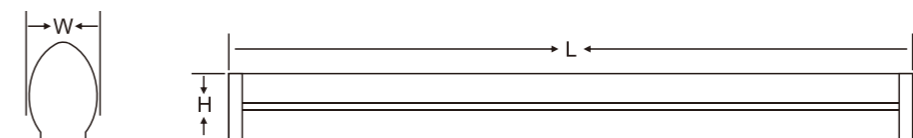

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HB(2)	10W+10W	591x89x131	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED215-HB(2)	15W+15W	916x89x131						
AP-LED220-HB(2)	20W+20W	1201x89x131						
AP-LED230-HB(2)	30W+30W	1487x89x131						
AP-LED240-HB(2)	40W+40W	1807x89x131						
AP-LED240-HB(2)	40W+40W	1807x89x131						
AP-LED250-HB(2)	50W+50W	2375x89x131						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-NBPC	20W	615x120x40	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-NBPC-2	40W	615x120x40		4000K				
AP-LED220-NBPC	40W	1225x120x40	120-347V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED 230-NBPC-4	60W	1225x120x40		6500K				
AP-LED225-NBPC	50W	1511x120x40	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED230-NBPC	60W	1511x120x40		6500K				
AP-LED245-NBPC	90W	1511x120x40	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED250-NBPC	100W	1511x120x40		6500K				
AP-LED 240-NBPC	80W	2394x120x40	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
AP-LED260-NBPC	120W	2394x120x40		6500K				




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

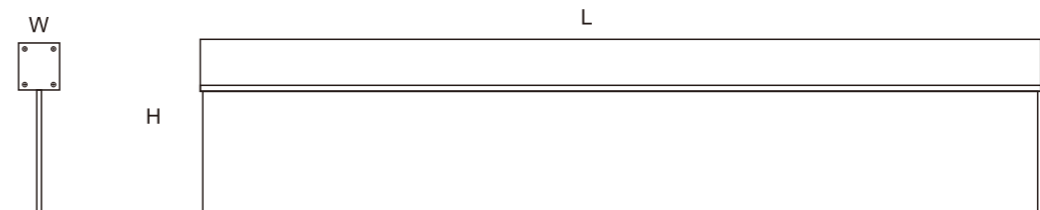

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED20-EPC	20W	574x49x250	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED30-EPC	30W	1184x49x250		4000K				
AP-LED40-EPC	40W	1470x49x250	220-240V	5000K	CRI>90	140Lm/W	120°	5 years
			6500K					




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-NYPC	20W	672x124x63	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-NYPC-2	40W	672x124x63						
AP-LED220-NYPC	40W	1282x124x63						
AP-LED320-NYPC	60W	1282x124x63						
AP-LED330-NYPC	90W	1282x124x63						
AP-LED225-NYPC	50W	1568x124x63						
AP-LED230-NYPC	60W	1568x124x63						
AP-LED245-NYPC	90W	1568x124x63						
AP-LED250-NYPC	100W	1568x124x63						
AP-LED420-NYPC	80W	2452x124x63						
AP-LED620-NYPC	120W	2452x124x63						




FEATURES:

- Aluminum Body
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-WPC	20W	626x99x75	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-WPC-2	40W	626x99x75						
AP-LED220-WPC	40W	1236x99x75						
AP-LED320-WPC	60W	1236x99x75						
AP-LED240-WPC	80W	1236x99x75						
AP-LED340-WPC	120W	1236x99x75						
AP-LED225-WPC	50W	1522x99x75						
AP-LED230-WPC	60W	1522x99x75						
AP-LED250-WPC	100W	1522x99x75						
AP-LED260-WPC	120W	1522x99x75						
AP-LED350-WPC	150W	1522x99x75						
AP-LED360-WPC	180W	1522x99x75						
AP-LED240-WPC-8	80W	2406x99x75						
AP-LED340-WPC-8	120W	2406x99x75						
AP-LED440-WPC	160W	2406x99x75						
AP-LED640-WPC	240W	2406x99x75						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

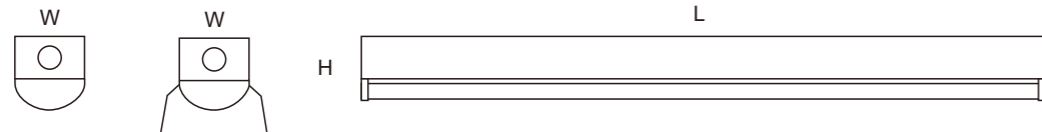

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HYPC	20W	577x71x83 / 577x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-HYPC	40W	1187x71x83 / 1187x128x112	120-347V	4000K 5000K				
AP-LED230-HYPC	60W	1501x71x83 / 1501x128x112	220-240V	6500K	CRI>90	140Lm/W		




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

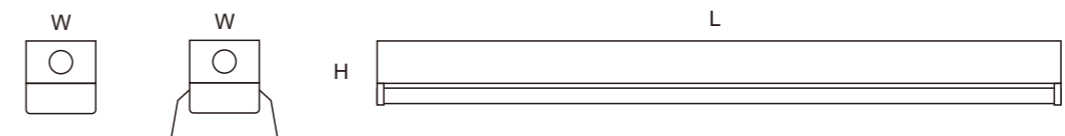

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-HFPC	20W	605x71x92 / 605x128x112	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-HFPC	40W	1215x71x92 / 1215x128x112	120-347V	4000K 5000K				
AP-LED230-HFPC	60W	1501x71x92 / 1501x128x112	220-240V	6500K	CRI>90	140Lm/W		




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Color: White, Silver, Black

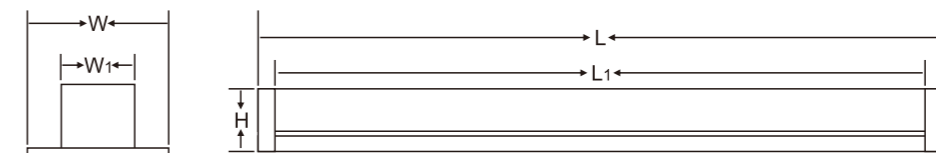

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-RPC	20W	599x86x66	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-RPC	20W	1209x86x66						
AP-LED224-RPC	48W	1209x86x66						
AP-LED230-RPC	60W	1495x86x66						
AP-LED230-RPC	60W	1820x86x66						
AP-LED240-RPC	80W	1820x86x66						
AP-LED240-RPC	80W	2390x86x66						
AP-LED248-RPC	96W	2390x86x66						
AP-LED260-RPC	120W	2390x86x66						




FEATURES:

- PC housing and cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED10-SF	10W	618x81x74	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED20-SF	20W	1215x81x74	120-347V	4000K	CRI>90	140Lm/W		
AP-LED30-SF	30W	1515x81x74	220-240V	5000K 6500K				




FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

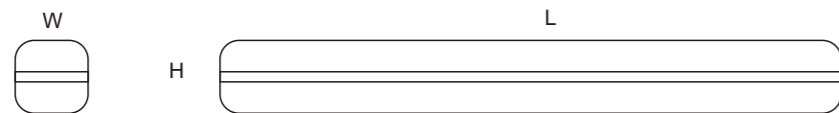

MODEL NO.	WATTAGE	DIMENSION WIDE VERSION L * W * H(mm)	DIMENSION SLIM VERSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-SF	20W	618x116x74	618x81x74	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED220-SF-2	40W	618x116x74	618x81x74						
AP-LED220-SF	40W	1215x116x74	1215x81x74						
AP-LED230-SF	60W	1215x116x74	1215x81x74						
AP-LED225-SF	50W	1515x116x74	1515x81x74						
AP-LED230-SF-5	60W	1515x116x74	1515x81x74						




FEATURES:


- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up




MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED410-SF	40W	664x140x90	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED415-SF	60W	664x140x90		4000K				
AP-LED420-SF	80W	1274x140x90	220-240V	5000K	CRI>90	140Lm/W		
AP-LED430-SF	100W	1574x140x90		6500K				

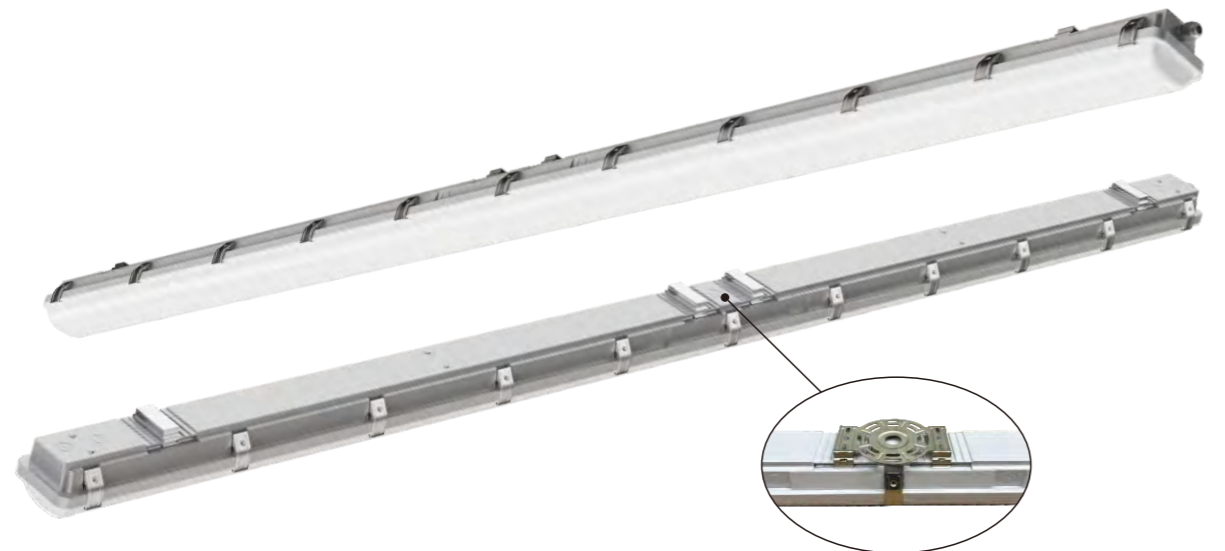


FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66

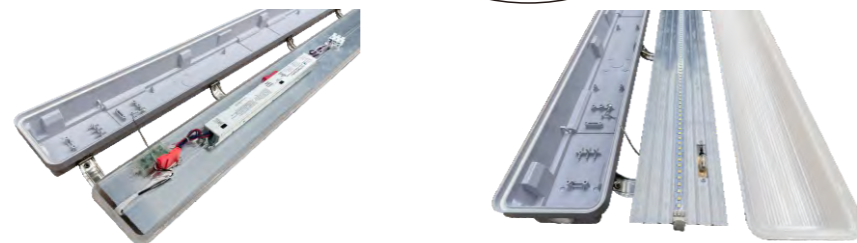

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

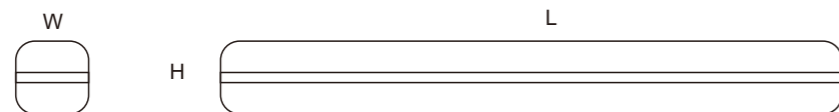

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-SF(L)	20W	650x110x90	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-SF(L)	40W	1215x110x90	120-347V	4000K				
AP-LED430-SF(L)	80~120W	2450x110x90	220-240V	5000K 6500K				




FEATURES:

- PC housing and PC cover
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP66



OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-SF(S)	20W	660x95x82	100-277V 120-347V 220-240V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED220-SF(S)	40W	1200x95x82		4000K				
AP-LED225-SF(S)	50W	1560x95x82		5000K				
AP-LED420-SF(S)	80~100W	2450x95x82		6500K	CRI>90	140Lm/W		




FEATURES:

- Stretching Aluminum Body
- Tempered Glass Lens
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP67

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

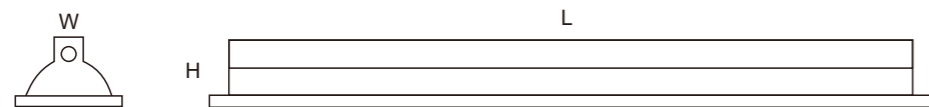

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-X	20W	630x115x79	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83	115Lm/W	120°	5 years
AP-LED220-X	40W	1230x115x79						
AP-LED230-X	60W	1230x115x79						
AP-LED225-X	50W	1530x115x79						
AP-LED230-X-5	60W	1530x115x79						




FEATURES:

- Stainless steel housing
- Tempered Glass Lens
- Stainless steel clips
- Silicon perimeter gasket
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance
- IP65

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED210-GSF	20W	710x140x97	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83	115Lm/W	120°	5 years
AP-LED220-GSF	40W	1310x140x97						
AP-LED230-GSF	60W	1310x140x97						
AP-LED225-GSF	50W	1610x140x97						
AP-LED230-GSF	60W	1610x140x97						




FEATURES:

- Cold rolled steel housing
- Stainless steel frame
- Aluminum heat sink
- Acrylic cover
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED220-J	10W	618x81x74	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-LED230-J	20W	1215x81x74	120-347V 220-240V	4000K 5000K 6500K	CRI>90	140Lm/W		



FEATURES:

- PC body, PC cover
- Isolated LED driver
- Epistar 2835 LED chips
- Easy maintenance
- IP65

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up



MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-SC20	20W	320x320x65	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-SC30	30W	320x320x65	120-347V	4000K 5000K 6500K	CRI>90	140Lm/W		
AP-SC40	40W	320x320x65	220-240V					




FEATURES:

- PC body, PC cover
- Isolated LED driver
- Epistar 2835 LED chips
- Easy maintenance
- IP65

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up

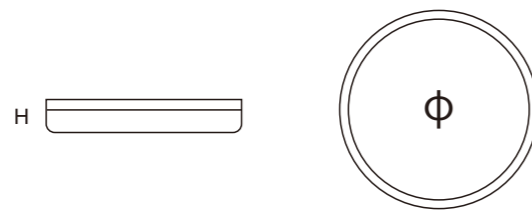

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-CC20	20W	φ320x64	100-277V	3000K	CRI>83	115Lm/W	120°	5 years
AP-CC30	30W	φ320x64	120-347V	4000K	CRI>90	140Lm/W		
AP-CC40	40W	φ320x64	220-240V	5000K 6500K				






FEATURES:

- 0.8mm steel housing
- 1.2mm aluminum heatsink
- Poly carbonate Cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-PLED-420	80W	615x285x100	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-PLED-620	120W	615x410x100						
AP-PLED-420	80W	1225x285x100						
AP-PLED-430	120W	1225x285x100						
AP-PLED-440	160W	1225x285x100						
AP-PLED-450	200W	1505x285x100						
AP-PLED-620	120W	1225x410x100						
AP-PLED-630	180W	1225x410x100						
AP-PLED-640	240W	1225x410x100						
AP-PLED-650	300W	1505x410x100						




FEATURES:

- Aluminum Body
- Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color:White,Silver,Black



MODEL NO.	WATTAGE	DIMENSION L*W*H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED220-BG	40W	1210x253x85	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED320-BG	60W	1210x253x85						
AP-LED420-BG	80W	1210x253x85						
AP-LED340-BG	120W	1210x253x85						
AP-LED440-BG	160W	1210x253x85						
AP-LED540-BG	200W	1210x253x85						
AP-LED225-BG	50W	1496x253x85						
AP-LED230-BG	60W	1496x253x85						
AP-LED425-BG	100W	1496x253x85						
AP-LED430-BG	120W	1496x253x85						
AP-LED540-BG	200W	1496x253x85						
AP-LED640-BG	240W	1496x253x85						
AP-LED240-BG	80W	2380x253x85	220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED260-BG	120W	2380x253x85						
AP-LED360-BG	180W	2380x253x85						
AP-LED460-BG	240W	2380x253x85						




FEATURES:

- Cold rolled steel housing, Aluminum heatsink, Poly carbonate cover
- Replaceable LED strips
- Isolated LED driver
- Easy maintenance

OPTIONS:

- Dimmable: TRIAC, 0/1-10V, DALI
- Microwave motion sensor
- Emergency battery back up
- Color: White, Silver, Black




MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	WARRANTY
AP-LED220-WB	40W	1225x175x73	100-277V 120-347V 220-240V	3000K 4000K 5000K 6500K	CRI>83 CRI>90	115Lm/W 140Lm/W	120°	5 years
AP-LED320-WB	60W	1225x175x73						
AP-LED240-WB	80W	1225x175x73						
AP-LED330-WB	90W	1225x175x73						
AP-LED340-WB	120W	1225x175x73						
AP-LED225-WB	50W	1511x175x73						
AP-LED230-WB	60W	1511x175x73						
AP-LED250-WB	100W	1511x175x73						
AP-LED260-WB	120W	1511x175x73						
AP-LED330-WB-5	90W	1511x175x73						
AP-LED350-WB	150W	1511x175x73						
AP-LED360-WB	180W	1511x175x73						



FEATURES:

- Flicker-free, flicker coefficient < 1%
- Both non-dimmable version (YB) and dimmable version(YA) are available, the YA is of 0/1-10V, PWM and resistance dimming and the dimming range is 0-100%; The light can be dimmed off without cutting of the AC power.
- Efficiency 95%
- The 12V cable is reserved for connecting the sensors, zigbee module, DALI module, etc. to realize the smart control.
- Potentiometer is equipped on top of the LEDdriver to adjust the output current/power of the finished high bay;
- Surge protection: L-N 4KV, L/N-GND 4KV;

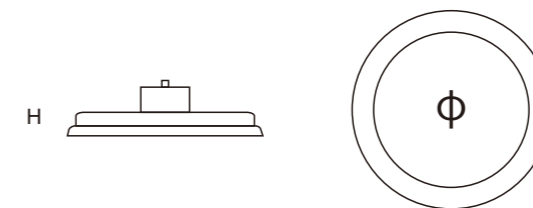

MODEL NO.	WATTAGE	DIMENSION L * W * H(mm)	VOLTAGE	COLOR	CRI	LUMENS	BEAM ANGLE	MATERIAL	WARRANTY
AP-UFO-120	50-120W	φ270x114	220-240V	3000K	CRI>73	140Lm/W	120°	Aluminum Die Casting	5 years
AP-UFO-150	80-150W	φ310x119		4000K	CRI>83	180Lm/W			
AP-UFO-200	130-200W	φ360x131	5000K 6500K	CRI>90	180Lm/W				